


1.3.1 Fast Photodiode Detectors (FPD)

Features

- Fast response time down to 25 psec
- Measure temporal pulse shape
- Spectral coverage from 193 to 1700 nm
- Optional attenuators, fiber optic adapters and integrating sphere adapters available

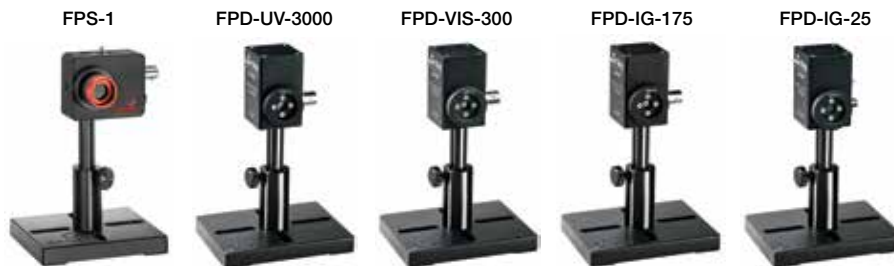

Description

Ophir's high speed, biased PIN photodiode detectors convert fast optical pulses into electrical signals. When terminated into 50Ω into an oscilloscope or spectrum analyzer, the temporal characteristics of lasers can be viewed and measured. A selection of models covers the spectrum from 190nm to 1700nm and a range of rise times and sensitivities. The photodiode bias voltage is supplied by internal batteries and/or external power supply depending on the model. Ophir's Pulse Characterization Sensors do not require calibration. Accessories available include attenuators, fiber optic adapters and adapters for attaching to integrating spheres.

For an FPD detector built into an integrating sphere sensor, see our **IS1.5-VIS-FPD-800, 1.5" High Speed Response, Multi-functional Integrating Sphere** on page 34A.

| Model ^(a) | FPS-1 | FPD-UV-3000 | FPD-VIS-300 | FPD-IG-175 | FPD-IG-25 |
|---|---------------------|----------------|-----------------------|------------------------|-------------------------|
| Detector Type | UV-Si | UV-Si | Si | InGaAs | InGaAs |
| Rise Time/Fall Time nsec | 1.5 | 3 | <0.3 | <0.175 | <0.025 |
| Spectral Range nm (see graph below) | 193-1100 | 193-1100 | 320-1100 | 900-1700 | 900-1700 |
| Active Area Diameter mm | 1.02 | 2.55 | 0.4 | 0.1 | 0.032 |
| Detector Area mm ² | 0.8 | 5.11 | 0.13 | 0.0079 | 0.00080 |
| Wavelength of Peak Sensitivity nm | 720 | 890 | 850 | 1600 | 1500 |
| Responsivity at Peak Wavelength A/W | 0.45 | 0.58 | 0.5 | 1.1 | 0.95 |
| Responsivity (Irradiance) at Peak Wavelength V/(W/cm ²) | 0.18 | 1.5 | 31 x 10 ⁻³ | 4.3 x 10 ⁻³ | 0.19 x 10 ⁻³ |
| Bias Voltage VDC | 12 | 24 | 9 | 6 | 6 |
| Bias Voltage Source | External or Battery | External | Batteries | Batteries | Batteries |
| Bandwidth | 233 MHz | >118 MHz | >1.2 GHz | >2 GHz | >15 GHz |
| Dark Current nA | 0.3 typ, 1.0 max | <10 | <0.1 | <2 | <3 |
| Noise Equivalent Power ^(b) pW/√Hz | 0.05 | <0.10 | <0.01 | <0.03 | 20 |
| Maximum Average Power Input ^{(b), (c)} mW | 3 | 15 | 25 | 10 | 10 |
| Mounting (Tapped Holes) | 1/4-20 | 8-32 & M4 | 8-32 & M4 | 8-32 & M4 | 8-32 & M4 |
| Output Connector | BNC | BNC | BNC | BNC | SMA |
| Accessory Threads | SM-1 | M20x1 | M20x1 | M20x1 | M20x1 |
| Version | | | | | |
| Compliance | CE, China RoHS | CE, China RoHS | CE, China RoHS | CE, China RoHS | CE, China RoHS |
| Part Number | 7Z02505 | 7Z02506 | 7Z02507 | 7Z02509 | 7Z02508 |

Notes: (a) All specs are with 50 ohm load

Notes: (b) At wavelength of peak sensitivity

Notes: (c) Maximum peak power is twice the average power for 10 nsec pulses

* For drawings please see page 109


Fiber Adapters ^(d) - see page 32

ND Attenuators ^(d)

IS6 Integrating Sphere Adapters - see page 37

| SC type | ST type | FC type | SMA type | ND1 nom. X10 attenuator | ND2 nom. X50 attenuator | For FPD | For FPS-1 |
|---------|---------|---------|----------|-------------------------|-------------------------|---------|-----------|
| 7Z08227 | 7Z08226 | 7Z08229 | 1G01236A | 7Z08200 | 7Z08201 | 7Z08350 | 7Z08289 |

Notes: (d) FPS-1 sensor requires also a SM1 to M20 mounting bracket adapter P/N 1G02259

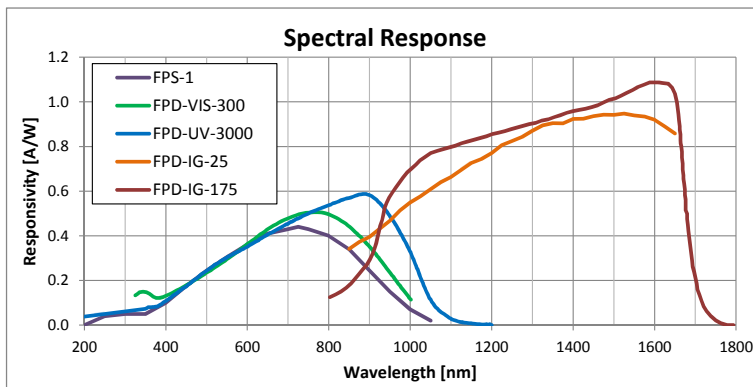

FPD detector mounted on IS6



ND Attenuators



Related Product
IS1.5-VIS-FPD-800
Integrating Sphere with
built in FPD Detector
(see p. 34A)



