

## 1.2.3 High Energy Pyroelectric Sensors

### 10μJ to 40J

#### Features

- Removable diffusers
- PE50-DIF-ER-C mainly for NIR lasers
- PE100BF-DIF-C for very large beams
- Rep rates up to 10kHz
- Measure lasers with pulse widths up to 20ms




Model	PE50-DIF-ER-C										PE100BF-DIF-C																			
Use	Mainly for 1064nm, 2.1μm and 2.94μm										Very large aperture																			
Diffuser	Diffuser out					Diffuser in					Diffuser out					Diffuser in														
Aperture mm	Ø46					Ø33					Ø96					Ø85														
Absorber Type	Metallic					Metallic with diffuser					BF					BF with diffuser														
Spectral Range μm <sup>(a)</sup>	0.19 - 3					0.4 - 3					0.15 - 3					0.4 - 2.5														
Surface Reflectivity % approx.	50					50					20					50														
Calibration Uncertainty ±% <sup>(a)</sup>	3					4					3					4														
Max Pulse Width Setting <sup>(c)</sup>	2μs	30μs	500μs	1ms	5ms	2μs	30μs	500μs	1ms	5ms	1ms	2ms	5ms	10ms	20ms	1ms	2ms	5ms	10ms	20ms										
Energy Scales	10J to 200μJ	10J to 200μJ	10J to 2mJ	10J to 2mJ	10J to 2mJ	30J to 600μJ	30J to 600μJ	30J to 6mJ	30J to 6mJ	30J to 6mJ	10J to 2mJ	10J to 20mJ	10J to 20mJ	10J to 20mJ	10J to 20mJ	40J to 40mJ	40J to 40mJ	40J to 40mJ	40J to 40mJ	40J to 40mJ										
Lowest Measurable Energy mJ <sup>(b)</sup>	0.01	0.01	0.06	0.08	0.1	0.05	0.05	0.3	0.4	0.5	0.4	0.7	1.5	1.5	1.5	2	3	5	5	5										
Max Pulse Width ms	0.002	0.03	0.5	1	5	0.002	0.03	0.5	1	5	1	2	5	10	20	1	2	5	10	20										
Maximum Pulse Rate pps	10kHz	5kHz	800Hz	400Hz	100Hz	10kHz	5kHz	800Hz	400Hz	100Hz	200Hz	100Hz	50Hz	35Hz	25Hz	200Hz	100Hz	50Hz	35Hz	25Hz										
Noise on Lowest Range μJ	1	1	6	10	20	5	5	30	50	100	80	150	250	200	200	300	500	1000	600	600										
Additional Error with Frequency %	±2% to 2kHz ±4.5% to 5kHz	±2%	±2%	±2%	±1% to 80Hz	±2% to 2kHz ±4.5% to 5kHz	±2%	±2%	±2%	±1% to 80Hz	±1% to 100Hz ±2.5% to 150Hz ±4.5% to 200Hz	±1%	±1%	±1%	±1%	±1% to 100Hz ±2.5% to 150Hz ±4.5% to 200Hz	±1%	±1%	±1%	±1%										
Linearity with Energy for > 10% of full scale <sup>(b)</sup>	±1.5%										±1%																			
Maximum Energy Density J/cm <sup>2</sup>	<100ns										1.5																			
	0.1					0.8					0.2					3														
	1μs					3					1					3														
	300μs					20					5					10														
	2ms					60					10					25														
Maximum Average Power W	15, 25 with optional heat sink (P/N 7Z08267)					40, 60 with optional heat sink (P/N 7Z08267)					25					50														
Maximum Average Power Density W/cm <sup>2</sup>	20					500					20					500														
Weight kg	0.3										1.2																			
Compliance	CE, UKCA, China RoHS										CE, UKCA, China RoHS																			
Version																														
Part Number: Standard Sensor	7Z02948 (1.5m cable)										7Z02942 (1.5m cable)																			
Sensor with different cable length	7Z02948B (5m cable)										7Z02942B (5m cable), 7Z02942C (10m cable)																			
Note: (a)	Calibrated at 532nm and 1064nm only					Calibrated at 1064nm, 2100nm and 2940nm					Calibrated at 532nm and 1064nm only					Calibrated at 532nm, 1064nm and 1550nm only														

Note: (b) With the "user threshold" setting set to minimum. For other settings, the spec is for >10% of full scale or greater than twice the "user threshold", whichever is greater. For use with Centauri, StarBright, StarLite, Nova II, Vega, Juno, Juno+, Juno-RS and EA-1. The sensors will operate with older Ophir meters and PC interfaces but do not support the threshold function and may give inaccurate readings with the diffuser in and therefore it is not recommended to use these sensors with older Ophir meters and PC interfaces. The user threshold feature allows adjustment of the internal threshold up to 25% of full scale if desired to avoid false triggering in noisy environments. For further information, see the FAQs on our Website.

Note: (c) With the LaserStar, Pulsar, USB1, Quasar and Nova with adapter only 2 of the 5 pulse width settings are available. For the PE50-DIF-ER-C, the 30μs and 1ms settings and for the PE100BF-DIF-C, the 1ms and 10ms settings. Furthermore, with the diffuser mounted, the sensor may saturate at lower than the maximum energy in some cases. Therefore it is recommended to use these sensors with the newer meters/PC interfaces.

\* For drawings please see page 144

PE50-DIF-ER-C

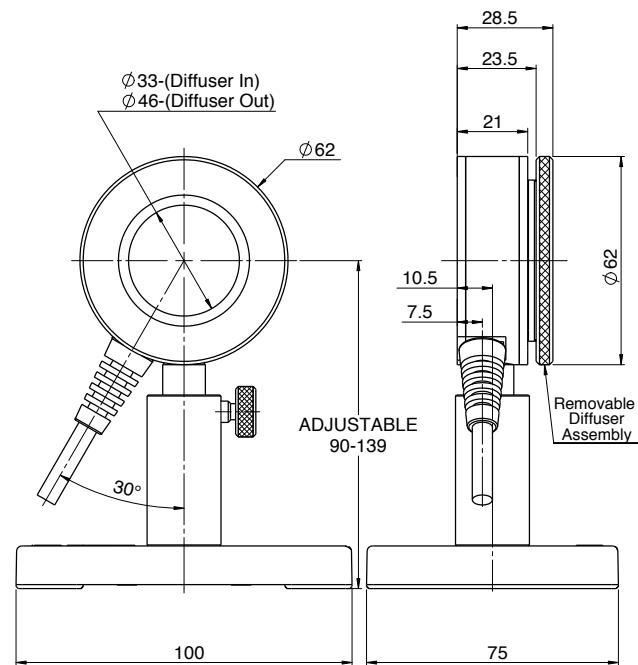

PE100BF-DIF-C

