

1.1.2.8 Short Exposure High Power Sensors

1.1.2.8.3 Comet Power Pucks

20W to 10kW


Features

- Comet power pucks measure heat rise from 10s exposure to laser
- Accurate, built in temperature compensation algorithm
- Up to 10kW
- Up to 100mm apertures




Model	Comet 1K		Comet 10K		Comet 10K-HD	
Use	For powers to 1kW		For powers to 10kW		For high power density beams	
Absorber Type	Broadband		Broadband		Broadband with reflective cone beam spreader	
Spectral Range μm	0.2 - 20		0.98-1.07 and 10.6		0.98-1.07 and 10.6	
Aperture mm	\varnothing 50mm		\varnothing 100mm		\varnothing 55mm	
Power Mode	20W to 1kW		200W to 10kW		200W to 10kW	
Repeatability	$\pm 1\%$ for same initial temperature		$\pm 1\%$ for same initial temperature		$\pm 1\%$ for same initial temperature	
Maximum Average Power Density kW/cm ²	Power	Damage Threshold	Power	Damage Threshold	Power	Damage Threshold
					Beam dia <40	Beam dia >40
	100W	10	1kW	3.5	1kW	7
	200W	8	2kW	2.8	2kW	10
	300W	6	3kW	2.5	3kW	8
	500W	5	5kW	1.5	5kW	6
	1kW	4	10kW	1	10kW	4
Power Accuracy +/- %	5		5		5	
Linearity with Power +/- %	$\pm 2\%$ $\pm 1\text{W}$ from 20W to 1kW		$\pm 2\%$ from 1kW to 10kW		$\pm 2\%$ from 1kW to 10kW	
Number of readings before probe must be cooled (for 25°C starting temp.)	100W	4	1kW	4	1kW	4
	300W	3	3kW	3	3kW	3
	400W	2	4kW	2	4kW	2
	1kW	1	10kW	1	10kW	1
Maximum Energy Density J/cm ²	<100ns		0.3		1	
	10 μs		0.8		3	
	1ms		10		30	
	10ms		50		150	
Time to Reading	Initial reading 10s after exposure, final reading 20s after exposure		Initial reading 20s after exposure, final reading 40s after exposure		Initial reading 30s after exposure, final reading 70s after exposure	
Temperature Compensation	Temperature compensated to give accurate readings independent of starting probe temperature					
Maximum Permitted Probe Temperature	70°C before measurement, 140°C after measurement					
Display	2x8 character LCD. Character height 5mm. CE Approved.					
Operation Mode	AUTO: Automatic measurement with laser set to 10s timed exposure. Unit senses temperature rise and measures automatically. MANUAL: User places probe in front of beam for 10s. Unit beeps to indicate start and stop measurement points. History: Stores last three readings. Calibration: Can be recalibrated by user.					
Battery	2 x AA. Lifetime in normal use approximately 1 year.					
Weight kg	0.3		1.2		1.2	
Compliance	CE, China RoHS		CE, China RoHS		CE, China RoHS	
Version	V1		V1		V2	
Part number	7Z02702		7Z02705		7Z02706	

Comet 1K

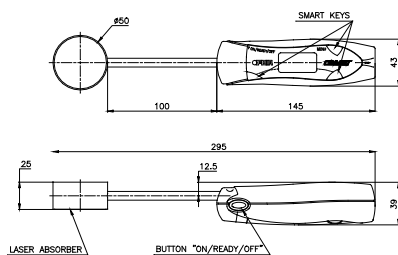

Comet 10K

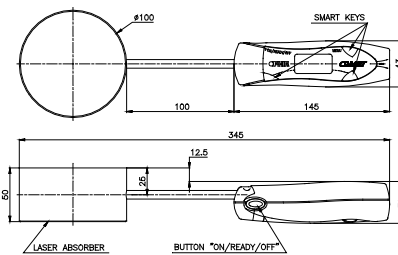

Comet 10K-HD

