

1.1.2.7 High Power Thermal Sensors

1.1.2.7.4 Very High Power Water Cooled Thermal Sensor

100W to 16kW

Features

- Very high powers
- Water cooled
- Up to 16kW
- Up to Ø55mm apertures
- Over temperature alarm and interlock


15K-W-BB-45




16K-W-BB-55



Model	15K-W-BB-45	16K-W-BB-55																														
Use	High power up to 15kW	High power up to 16kW, larger aperture, over temperature alarm and interlock																														
Absorber Type	Beam deflector + broadband absorber	Beam deflector + broadband absorber																														
Spectral Range μm ^(a)	0.8 - 2, 10.6	0.8 - 2, 10.6																														
Aperture mm	Ø45mm	Ø55mm																														
Power Range	100W - 15kW	100W - 16kW																														
Power Scales	15kW / 4kW / 400W	16kW / 4kW / 400W																														
Power Noise Level	1W	1W																														
Backscattered Power ^(b, c)	~3.5% without Scatter Shield, ~1% with Scatter Shield	~3.5% without Scatter Shield, ~1% with Scatter Shield																														
Maximum Average Power Density kW/cm ²	See note ^(c) and table ⁽¹⁾ below	See note ^(c) and table ⁽¹⁾ below																														
Response Time with Meter (0-95%) typ. s	3.5	3.5																														
Calibration Uncertainty $\pm\%$	1.9	1.9																														
Power Accuracy $\pm\%$	5 ^(a)	5 ^(a)																														
Linearity with Power $\pm\%$	2	2																														
Variation with Beam Size	$\pm 1.7\%$ from 15 to 30mm	$\pm 1\%$ from 10 to 35mm																														
Cooling	water ^(d)	water ^(d)																														
Minimum Water Flow Rate	12 liter/min at full power ^(d)	12 liter/min at full power ^(d)																														
Water Pressure Requirements at Max Flow Rate	Pressure drop across sensor ~0.2MPa	Pressure drop across sensor at full flow rate <0.1MPa																														
Water Connectors ^(e)	Quick connector for 3/8" OD nylon tubing	Quick connector for 1/2" OD nylon tubing																														
Over Temperature Warning / Interlock	N.A.	Module on sensor near output cable with over temperature LED, loud audible signal and M8 3 connector interlock																														
Cable Length and Connections	5 meters terminated in Ophir DB15 smart connector	Signal: 5 meters terminated in DB15 Interlock: M8 connector with 1.5 meter cable terminated in flying leads: Brown - common, Black - N.C., Blue - N.O.																														
Optional Scatter Shield Accessory ^(e)	10K-W / 15K-W Scatter Shield (P/N 7Z08295)	16K-W Scatter Shield (P/N 7Z08355)																														
Weight kg	6	8																														
Compliance	CE, UKCA, China RoHS	CE, UKCA, China RoHS																														
Version	V2	V2																														
Part number	7Z07133	7Z07131																														
Note: (a)	Calibrated at 1.07 μm and 10.6 μm . For other wavelengths in the ranges of 0.8 - 0.95 μm & 1.1 - 2 μm , the calibration error may be up to $\pm 2\%$ more.																															
Note: (b)	When scatter shield is installed, use the NIRS setting to compensate for slightly higher reading. When not installed, use the NIR setting.																															
Note: (c)	For circular beam centered within 1/4 of beam diameter. IMPROPERLY CENTERED BEAM CAN CAUSE DAMAGE TO SENSOR. Maximum tilt angle ± 5 degrees. For rectangular beam please consult Ophir representative.																															
Note: (d)	Water temperature range 18-30°C. Water temperature rate of change <1°C/min. The recommended flow rate can be lowered proportionately at lower than full power but should not be below 3 liter/min. The response time will be optimum at near 12 liter/min flow rate. For solutions for prolonged usage with untreated water (tap water, non DI water), please contact Ophir.																															
Note: (e)	For further information and other options see Accessories for High Power Sensors on pages 97-100.																															
Table: (1)	<table border="1"> <thead> <tr> <th>Beam diameter</th> <th>Max power density</th> <th>Max energy density</th> <th>1ms pulse width</th> <th>3ms pulse width</th> <th>10ms pulse width</th> </tr> </thead> <tbody> <tr> <td><15mm</td> <td>10kW/cm²</td> <td>30J/cm²</td> <td>60J/cm²</td> <td>150J/cm²</td> <td>100J/cm²</td> </tr> <tr> <td>15 - 20mm</td> <td>7kW/cm²</td> <td>20J/cm²</td> <td>40J/cm²</td> <td>100J/cm²</td> <td>70J/cm²</td> </tr> <tr> <td>20 - 40mm</td> <td>5kW/cm²</td> <td>15J/cm²</td> <td>30J/cm²</td> <td>70J/cm²</td> <td>60J/cm²</td> </tr> <tr> <td>40 - 45mm</td> <td>4kW/cm²</td> <td>12J/cm²</td> <td>25J/cm²</td> <td>60J/cm²</td> <td></td> </tr> </tbody> </table>		Beam diameter	Max power density	Max energy density	1ms pulse width	3ms pulse width	10ms pulse width	<15mm	10kW/cm ²	30J/cm ²	60J/cm ²	150J/cm ²	100J/cm ²	15 - 20mm	7kW/cm ²	20J/cm ²	40J/cm ²	100J/cm ²	70J/cm ²	20 - 40mm	5kW/cm ²	15J/cm ²	30J/cm ²	70J/cm ²	60J/cm ²	40 - 45mm	4kW/cm ²	12J/cm ²	25J/cm ²	60J/cm ²	
Beam diameter	Max power density	Max energy density	1ms pulse width	3ms pulse width	10ms pulse width																											
<15mm	10kW/cm ²	30J/cm ²	60J/cm ²	150J/cm ²	100J/cm ²																											
15 - 20mm	7kW/cm ²	20J/cm ²	40J/cm ²	100J/cm ²	70J/cm ²																											
20 - 40mm	5kW/cm ²	15J/cm ²	30J/cm ²	70J/cm ²	60J/cm ²																											
40 - 45mm	4kW/cm ²	12J/cm ²	25J/cm ²	60J/cm ²																												



15K-W-BB-45

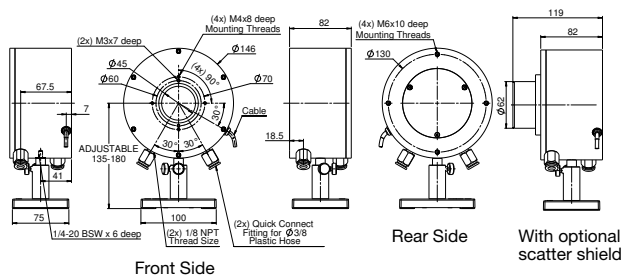

16K-W-BB-55

