
SupIR 11mm f/1.05, Athermalized Manual Focus 680021



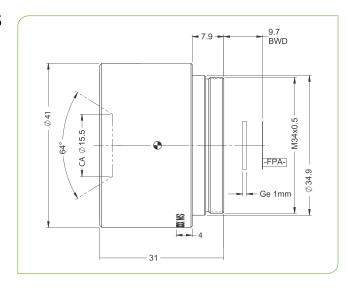

	HFOV	320x240	384x288	640x480	
	17µ	27.9°	33.6°	57.3°	
	12µ	19.6°	23.6°	39.7°	

Property				Value			
Optical							
Focal Length			11mm	11mm			
F#			1.05	1.05			
Average transmission (8-12µm)			91% (HD)	91% (HD) / 88% (HC)			
Back Focal Length			12.48mm	12.48mm in air			
Mechanical							
Focus Mechanism			Manual	Manual			
Depth of Field			2.4m to i	2.4m to infinity			
Focus Range			0.2m to i	0.2m to infinity			
Weight			84gr	84gr			
Max. Dimensions			Ø41.0mn	Ø41.0mm x 31mm			
Environmental							
Operation Temperature Storage Temperature Sealing			-40°C to	-40°C to +80°C -50°C to +110°C			
			-50°C to				
			IP 68 fror	IP 68 front element only			
Configurations	Weight (gr)	Dimensions	BWD**	Thread	Coating		
680021-004	87	Ø38.1mm x 37mm	18.36	1.3125-32 UNS	HD, MWIR filter coating		
680021-006					110		
680021-007	84	Ø41.0mm x 31mm	9.7	M34x0.5	HC		
680021-009					HD		

^{*} The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.

^{**} The BWD value is calculated for a unique detector setup with varying sealing windows in terms of thickness and material. For more details, contact your local sales representative.

