


FoldIR 16-180mm f/3.6, Motorized Continuous Zoom 680389

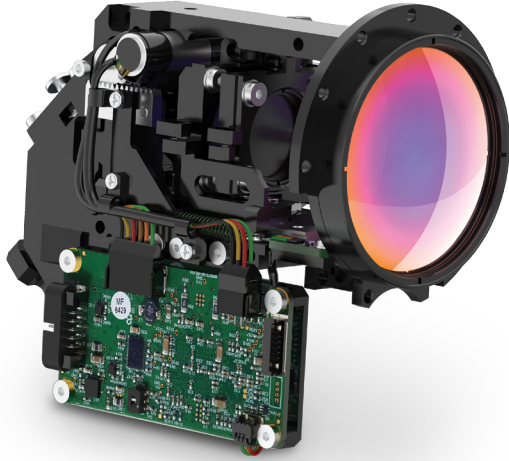


MWIR | ZOOM

WFOV(16mm)	
HFOV	640x480
10μ	22.6°

NFOV(180mm)	
HFOV	640x480
10μ	2°

Property	Value	
Optical	WFOV	NFOV
Focal Length	16mm	180mm
F/#	3.6	3.6
Average transmission (3.4-4.2μm)	≥80% (LRHC); >82% (HD)	
Cold stop to FPA Distance	12mm	
Cold Stop CA	Ø3.37mm	
Back Focal Length	23.08mm in air	
Minimum Focusing Range	5m	50m
Nuc (by defocus)	Blur to 7mm diameter, Optional: mechanical shutter	
Mechanical		
Focus Mechanism	Motorized. Adjustable	
Focus Time (minimum range to ∞)	≤5.5 sec.	
Zoom Time (NFOV to WFOV)	≤1 sec.	
Weight	465gr	
Max. Dimensions	Length 121mm; Width 70mm; height 102mm	

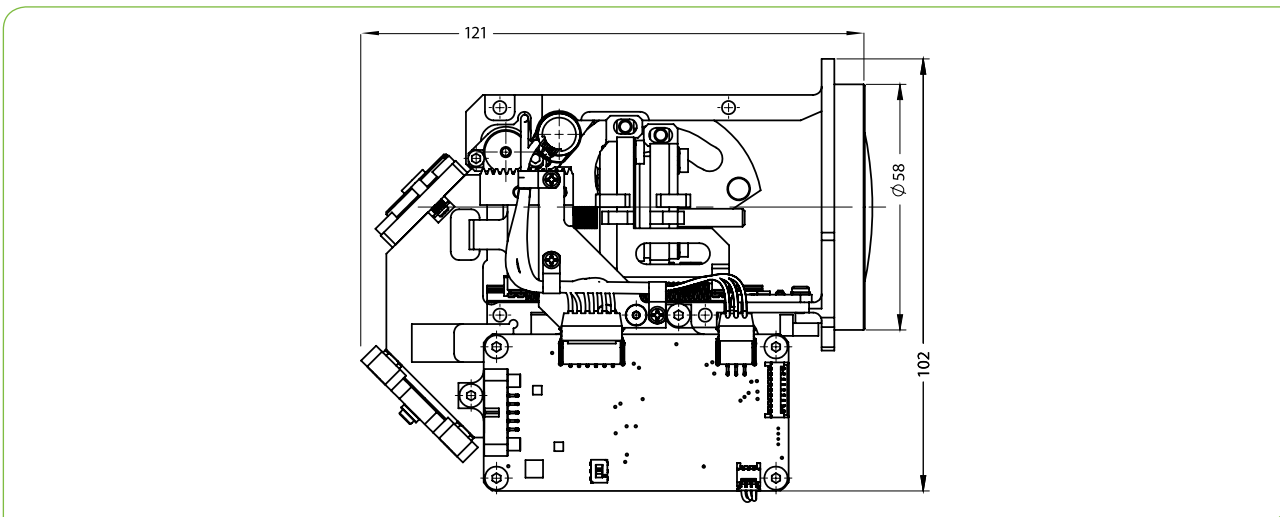

MWIR | ZOOM

Property	Value
Electrical	
Lens Control	Designated lens controller
Supply Voltage	12V
Current Consumption	< 0.5A average, 1.0A peak
Communication Protocol	RS422, RS232
Environmental	
Operation Temperature	-32°C to +75°C
Storage Temperature	-54°C to +85°C
Sealing	IP67 front lens only
Configurations	
680389-001	High Durability
680389-002	Low Reflection Hard Carbon**

* NOTE: The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.

** For detailed LRHC coating specifications see page 13