

LightIR 20-275mm f/5.5, Motorized Continuous Zoom 680314




WFOV(20mm)

HFOV	640x512
15 μ	28.0°

NFOV(275mm)

HFOV	640x512
15 μ	1.9°

Property	Value	
Optical	WFOV	NFOV
Focal Length	20mm	275mm
F/#	5.5	
Cold Stop to FPA Distance	19.7mm	
Cold Stop CA	Ø3.52mm	
Average Transmission (3.4-5 μ m)	≥92 (HD) / 87% (LRHC)	
Back Focal Length	23.52mm in air	
Minimum Focus Range	5m	50m
Nuc (by defocus)	Yes	
Mechanical		
Focus Mechanism	Motorized	
Focus Time (minimum range to ∞)	≤8 sec.	
Zoom Mechanism	Motorized	
Zoom Time (NFOV to WFOV)	≤5 sec.	
Through-zoom boresight	Within a radius of 0.15mm at the focal plane	
Weight	264gr	
Max. Dimensions	Ø58mm x 67.1mm	

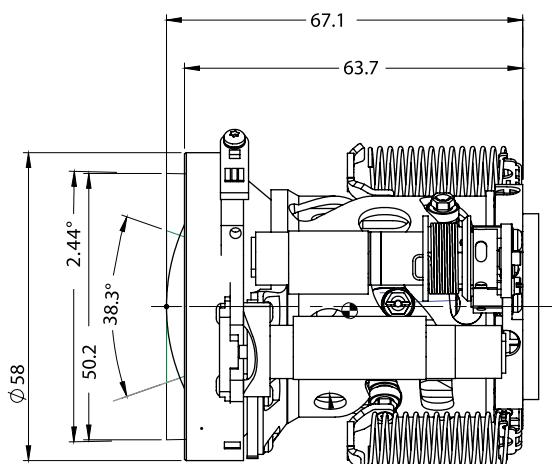

Property

Value

Electrical

Lens Control	Designated lens controller
Supply Voltage	12V
Current Consumption	0.2A average, 1.0A peak
Communication Protocol	RS485, RS422

Environmental

Operating Temperature	-32°C to + 70°C
Storage Temperature	-40°C to + 80 °C
Sealing	IP 67 front element only

Configurations

680314-001	HD
680314-002	LRHC**
680314-003	HD with folded control card

* NOTE: The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.

** For detailed LRHC coating specifications see page 13