

SupIR 15-300mm f/5.5, Motorized Continuous Zoom 680313




WFOV(15mm)

HFOV	640x512
15 μ	36.4°

NFOV(300mm)

HFOV	640x512
15 μ	1.8°

Property	Value	
Optical	WFOV	NFOV
Focal Length	15mm	300mm
F/#	5.5	
Cold Stop to FPA Distance	19.7mm-19.1mm	
Cold Stop CA	Ø3.58mm	
Average Transmission (3.4-5.0 μ m)	94% (HD)	
Back Focal Length	25.33mm in air	
Minimum Focus Range	5m	50m
Nuc (by defocus)	Yes	
Mechanical		
Focus Mechanism	Motorized	
Focus Time (minimum range to ∞)	\leq 1 sec.	
Zoom Mechanism	Motorized	
Zoom Time (NFOV to WFOV)	\leq 5 sec.	
Weight	560gr	
Max. Dimensions	Ø67mm x 93mm	

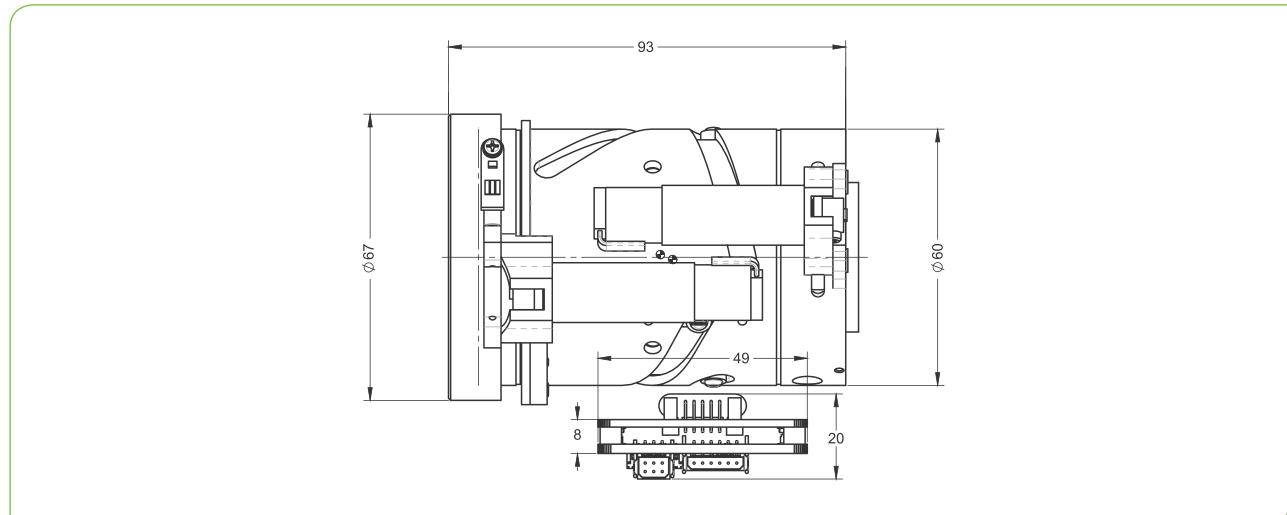

Property

Value

Electrical

Lens Control	Designated lens controller
Supply Voltage	12V
Current Consumption	< 0.5A average, 1.0A peak
Communication Protocol	RS422

Environmental

Operating Temperature	-32°C to +80°C
Storage Temperature	-54°C to +85°C
Sealing	IP 67 front element only

Configurations

680313-003	HD
680313-004	HC

* NOTE: The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.