

SupIR 45/135mm f/1.1, f/1.6, Motorized Focus 680020*

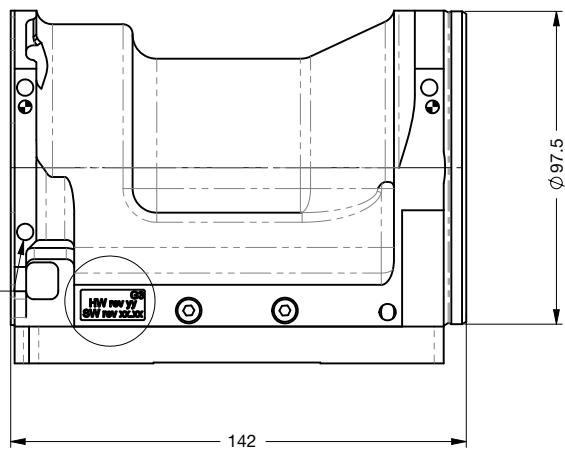


WFOV(45mm)		
HFOV	320x240	640x480
17µ	7.0°	14.3°
12µ	4.9°	9.9°

NFOV(135mm)		
HFOV	320x240	640x480
17µ	2.3°	4.6°
12µ	1.6°	3.3°

Property	Value	
Optical	WFOV	NFOV
Focal Length	45mm	135mm
F#	1.1	1.6
Average transmission (8-12µm)	85% (HC)	
Back Focal Length	48.35mm in air	
Mechanical		
Focus Mechanism	Motorized adjustable	
Focus Range	10m to infinity	50m to infinity
Focus Time (full travel)	<1 sec.	
Weight	1.4kg	
Max. Dimensions	Length 142mm, Width 97.5mm, Height 110mm	
FOV Switch Mechanism	Motorized	
FOV Switch Time	<2 sec.	

* Requires export license

**Property****Value****Electrical**

Focus & FOV Motor	0.7A average, 1.0A peak at T=-40°C 0.6A average, 1.0A peak at T=20°C
-------------------	---

Supply Voltage	12V
----------------	-----

Current Consumption	0.7A average, 1.0A peak
---------------------	-------------------------

Environmental

Operation Temperature	-40°C to +65°C
-----------------------	----------------

Storage Temperature	-40°C to +71°C
---------------------	----------------

Sealing	IP 67 front element only
---------	--------------------------

Configurations	Weight (gr)	Dimensions	BWD**	Thread	Coating
680020-009	1400	142mm x 110mm x 97.5mm	9.24	4x 3.175	HC mounting plate

* The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.

** The BWD value is calculated for a unique detector setup with varying sealing windows in terms of thickness and material. For more details, contact your local sales representative.